4 CAVITIES MANIFOLD INTERAXES 250 x 250 / *4 FACH HEISSKANALBLOCK STICHMASS 250 x 250*

Manifold / *Verteilerblock*		
CODE	NOZZLE TYPE / *DÜSENTYP*	d
E90227-40	DN18 - F11	Ø 4
E90227-60	KS5/8 Ø22-F16-F24-DN22	Ø 6
E90227-80	KS5/8 Ø30 - DN30	Ø 8
E90227-115	F32 - DN44	Ø 11.5

SPARE PARTS / *ERSATZTEILE*

CODE	DESCRIPTION *BESCHREIBUNG*	Q.TY *MENGE*
E92033	Heater 240 VOLT Power 2100 WATT each *Heizung 240 VOLT* *2100 WATT pro Stück*	2

CODE	DESCRIPTION *BESCHREIBUNG*	Q.TY *MENGE*
E08562	Thermocouple Fe-CuNi J type calibration *Thermofühler Fe-CuNi* *Type J.*	2

See page 26.02 for the information related to the ACCESSORIES / *Zubehör s. Seite 26.02*

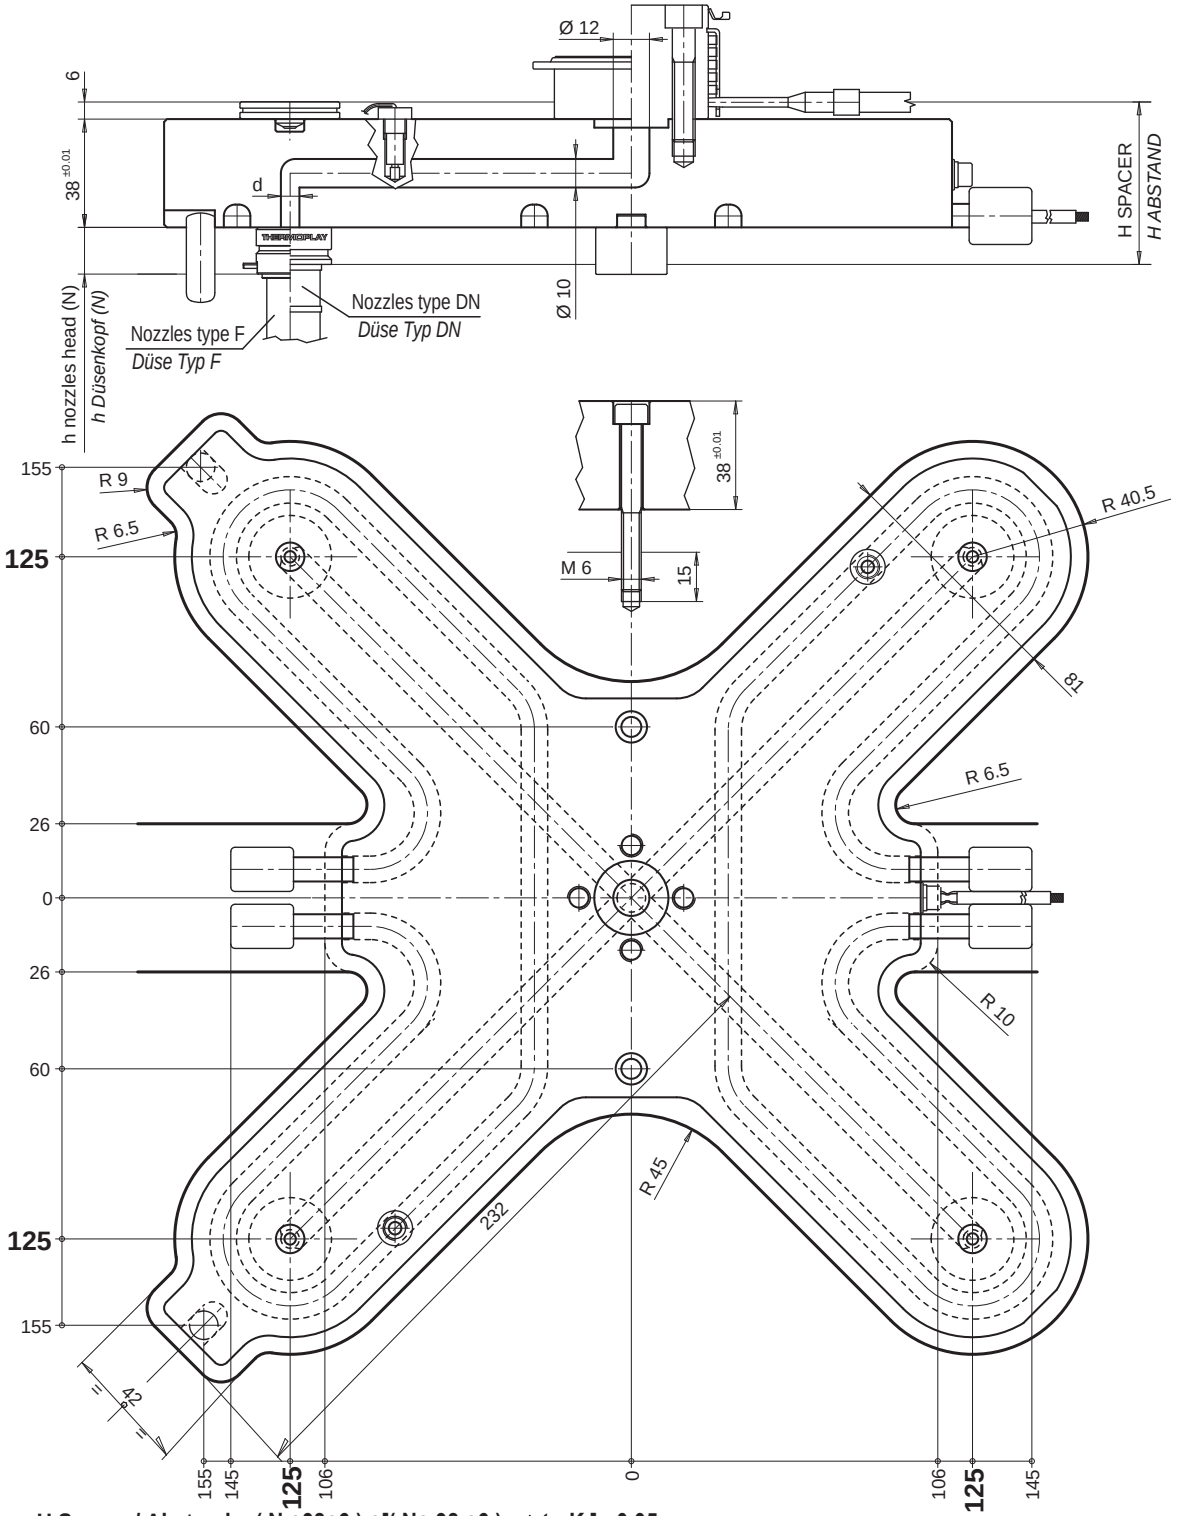

H Spacer / Abstand = (N +38+6) +[(N+ 38 +6) • △t • K] - 0.05 = mm

N= nozzle head / *Abstand*

△t = Temperature difference between the hot runner and the mould / *Temperaturunterschied zwischen dem Heisskanal und dem Werhreng.*

K = Steel thermal expansion coefficient / *Wärmeausdehnungs Koeffizent für Stahles (= 0.0000125)*

It is possible to manufacture special manifolds with the same overall dimensions and distance between injection centres from 240 x 240 mm up to 250 x 250 mm, to be used also with KS5/8 Ø44 nozzle types in addition to the indicated types.

Ex. "Manifold interaxes 245 x 245 mm and KS5/8 Ø44 nozzles type" (special due to interaxes and nozzle type)

Ex. "Manifold interaxes 245 x 245 mm and DN22 nozzles type" (special due to interaxes)

Ex. "Manifold interaxes 250 x 250 mm and KS5/8 Ø44 nozzles type" (special due to nozzle type)

Es ist möglich Standard Verteilerblöcke zu bestellen mit einem Stichmaß von 240x240 bis max. 250x250 mm mit Düsentypen KS5/8 Ø44.

Beispiel: Stichmaß 245x245 mm mit Düsentyp KS5/8 Ø44(speziell für Stichmaß und Düsentyp)

Beispiel: Stichmaß 245x245 mm mit Düsentyp DN22 (speziell für Stichmaß)

Beispiel: Stichmaß 250x250 mm mit Düsentyp KS5/8 Ø44 (speziell für Düsentyp)