



Live demo
Hall 13
Booth A33

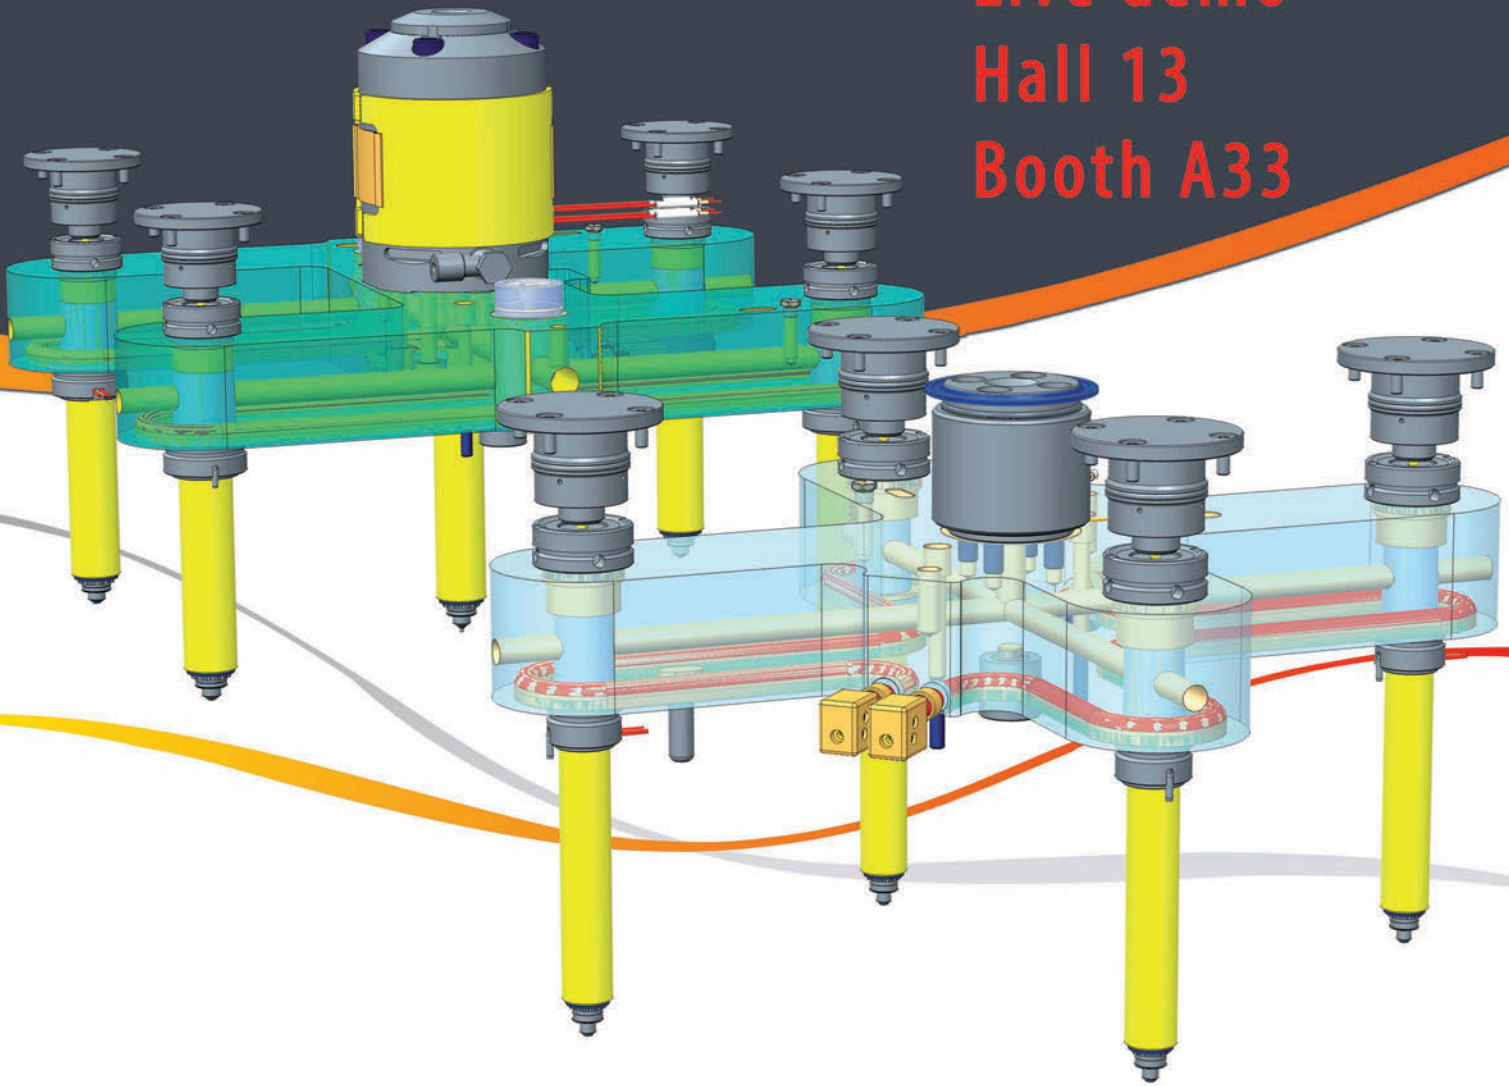

- **Injection system:** Thermoplay SS161003
- **Nozzles:** N.5 FN3BT valve gate nozzles diam.32, L=121 mm
N.4 FN3BT valve gate nozzles diam.24, L=121 mm
- **Valve gate actuation:** pneumatic
- **Moulded part:** 2-colours container
- **Dimensions:** 443x335x172.5 mm
- **Weight:** 437 gr (251 gr+186 gr)
- **Avg thickness:** 1,2 mm
- **Material:** Polypropilen
- **Injection moulding cycle:** 0,6 sec
- **Total cycle time:** 20 sec
- **Hot runner temperature:** 240° C
- **Mold temperature:** 40° C
- **Mold maker:** S.C.S. Società Costruzione Stampi s.r.l.
- **Injection machine:** BMB 1150
- **Temperature controller:** Thermoplay THM6 24 zones

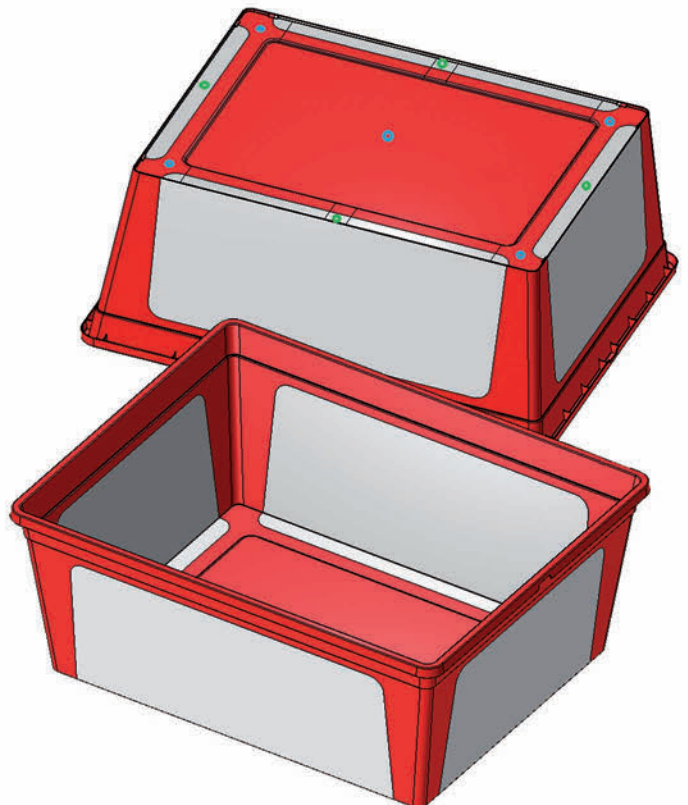

THERMOPLAY
HotRunnerSystems

 A business of BARNES GROUP INC