



• MONOUGELLO / MONOBUSE

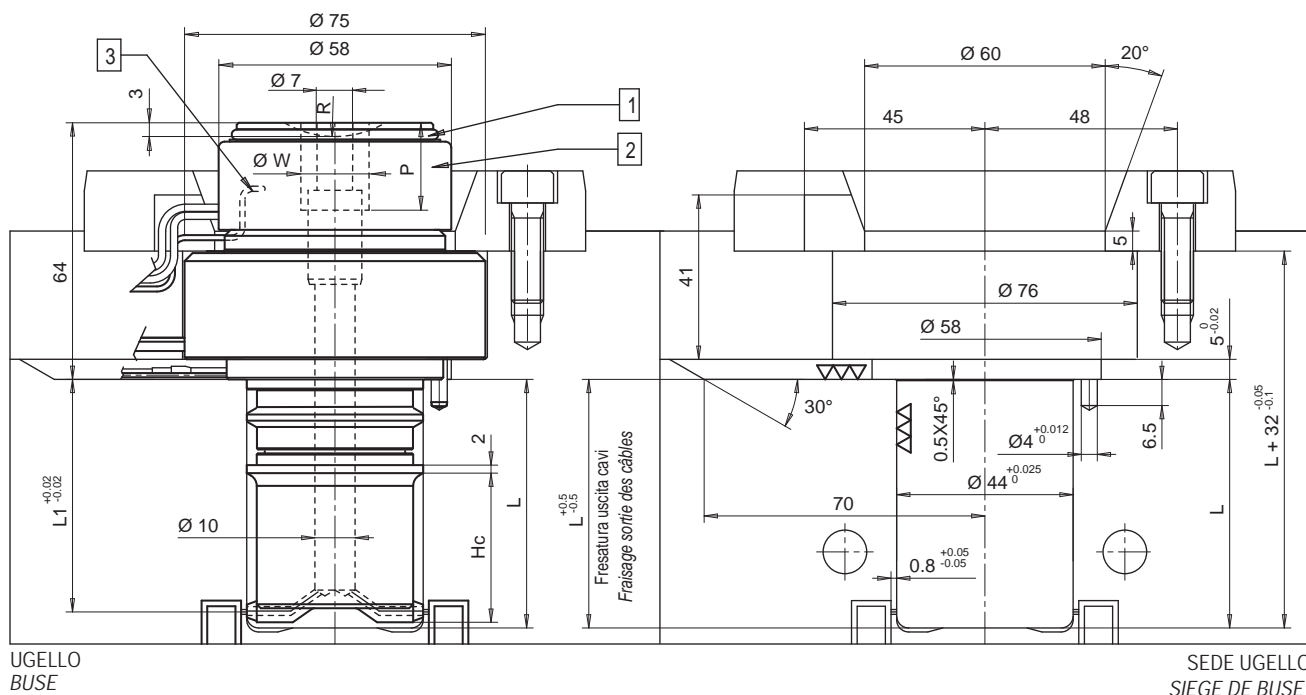


UGELLO
BUSE

SEDE UGELLO
SIEGE DE BUSE

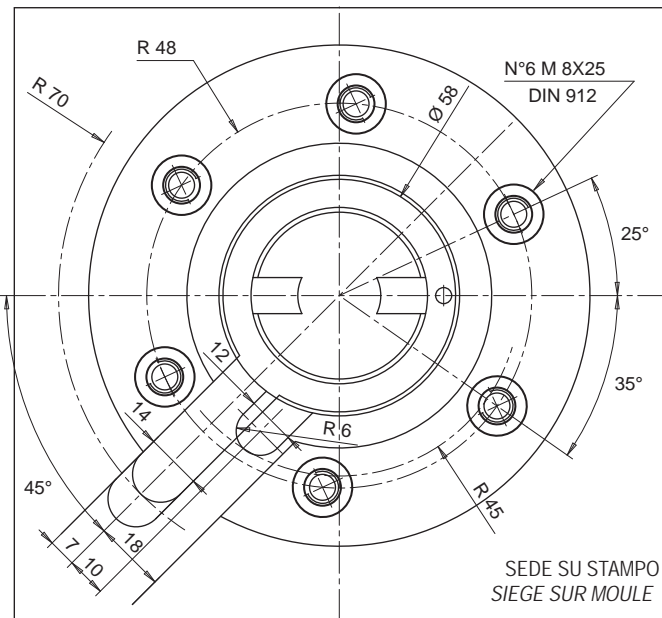

SEDE SU STAMPO
SIEGE SUR MOULE

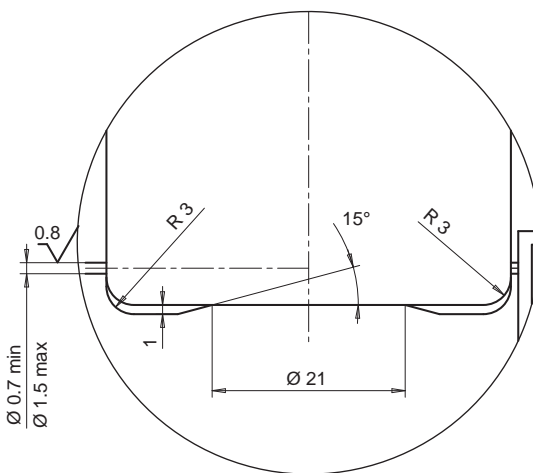



RESISTENZA E TERMOCOPPIA
RESISTANCE ET THERMOCOUPLE

RESISTENZA RESISTANCE	Marrone / Marron Marrone Nero Marron Noir	230 V
TERMOCOPPIA THERMOCOUPLE	Rosso / Rouge	TC+
	Blu / Bleu	TC-


RICAMBI / RECHANGES

<p>1 ANELLO DI TENUTA PER RESISTENZA TESTA BAGUE D'ÉTANCHEITÉ POUR RESISTANCE TÊTE</p> <p>Codice/code E09063</p>	<p>2 GRUPPO RESISTENZA TESTA 230 VOLT GROUPE RESISTANCE TÊTE 230 VOLT</p> <p>Codice/code E09044 550 W</p> <p>Marrone / Marron Marrone-Nero Marron-Noir</p> <p>230 V</p>	<p>3 TERMOCOPPIA TESTA THERMOCOUPLE TÊTE</p> <p>Termocoppie a massa con calibratura tipo J Thermocouples à la masse calibré type J</p> <p>Codice/code E07033</p> <p>Rosso / Rouge + Blu / Bleu -</p>
--	---	--

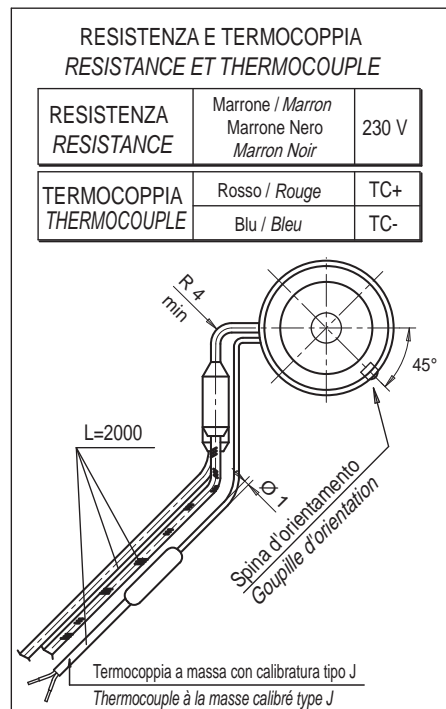


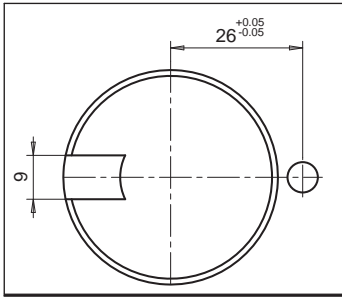


1 PUNTO D'INIEZIONE / 1 POINT D'INJECTION				
Codice ugello / Code buse	L	L1	Hc	Potenza resistenza Watt: Puissance résistance Watt:
E08021/S0..	62	58	39	700
E08022/S0..	72	68	39	
E08023/S0..	92	88	39	
E08024/S0..	112	108	39	

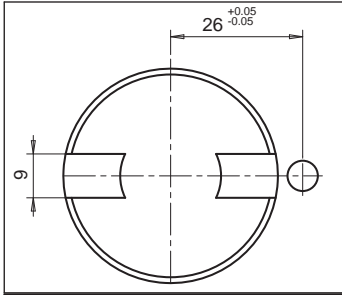


2 PUNTI D'INIEZIONE / 2 POINTS D'INJECTION				
Codice ugello / Code buse	L	L1	Hc	Potenza resistenza Watt: Puissance résistance Watt:
E08025/S0..	62	58	39	700
E08026/S0..	72	68	39	
E08027/S0..	92	88	39	
E08028/S0..	112	108	39	

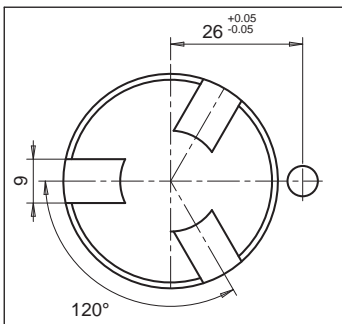

3 PUNTI D'INIEZIONE / 3 POINTS D'INJECTION				
Codice ugello / Code buse	L	L1	Hc	Potenza resistenza Watt: Puissance résistance Watt:
E08029/S0..	62	58	39	700
E08030/S0..	72	68	39	
E08031/S0..	92	88	39	
E08032/S0..	112	108	39	

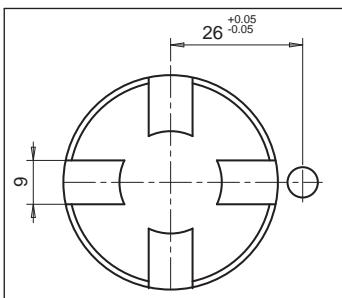

4 PUNTI D'INIEZIONE / 4 POINTS D'INJECTION				
Codice ugello / Code buse	L	L1	Hc	Potenza resistenza Watt: Puissance résistance Watt:
E08033/S0..	62	58	39	700
E08034/S0..	72	68	39	
E08035/S0..	92	88	39	
E08036/S0..	112	108	39	

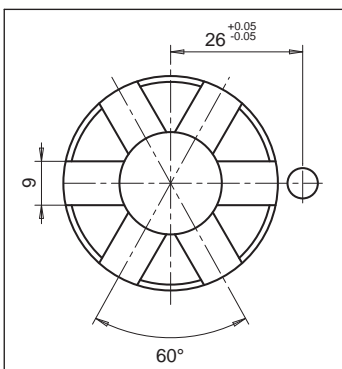

6 PUNTI D'INIEZIONE / 6 POINTS D'INJECTION				
Codice ugello / Code buse	L	L1	Hc	Potenza resistenza Watt: Puissance résistance Watt:
E08037/S0..	62	58	39	700
E08038/S0..	72	68	39	
E08039/S0..	92	88	39	
E08040/S0..	112	108	39	

Suffisso / Suffixe	R	WxP
...../S001	0	
...../S002	1/2"	
...../S003	19.5	
...../S004	40	
...../S005		Ø14x21
...../S006		Ø16x21

Esempio di ordine / Exemple d'ordination

E08037/S002

Codice ugello / Code buse

Raggio testa / Rayon tete